

Safety Features



Controlled Descent Device

- The ultimate anti-drop safety feature
- Offers a lifetime of protection from a free-falling door




FREE-FALLING DOOR

Warning: Injury or death!

Comprehensive Finger-Shield System



- Section Joints
- Track Mounts
- Roller Shields
- Hemmed-rolled Edges
- Curve Shields
- Safety Hinges
- Reduced Hole Sizes




FINGER ENTRAPMENT

Warning: Serious injury!

Safety Spring System



- Lock-on Side Spring Mount
- Lock-on Side Bearing Plate
- Lock-on Bottom Brackets
- Concealed Lift Cables

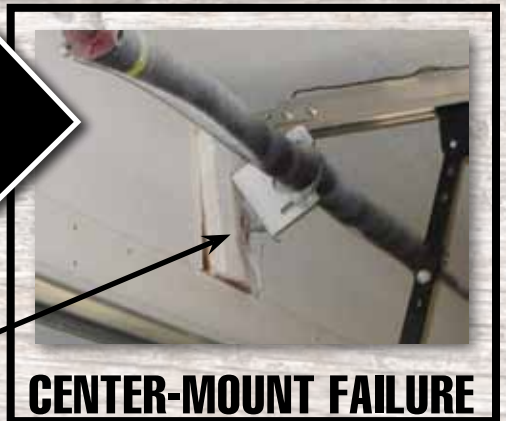

CENTER-MOUNT FAILURE

Warning: Injury or death!

Lifetime Warranty

Lifetime Spring System –
Enduring Quality, Peace of Mind



Burton Doors

- 30,000 cycle galvanized springs
- 1/8" lift-cables (2,000 lb. capacity)
- Torsion bearings have permanent grease (needs no lubrication)
- Lifetime Warranty



Competitors


- Typically rated between 5,000–10,000 cycles
- 3/32" lift cables
- Oil-tempered, non-galvanized
- Bearings need regular lubrication
- Typical warranty: 1-3 years

Lifetime Hardware

- Lifetime sealed ball-bearing rollers
- Commercial grade reverse angle shields
- Case-hardened fasteners
- 14 gauge steel hinges
- 10 gauge steel roller brackets
- 14/17 gauge hemmed-rolled edge tracks
- 100,000 cycle rating on hardware

Burton Doors

Competitors

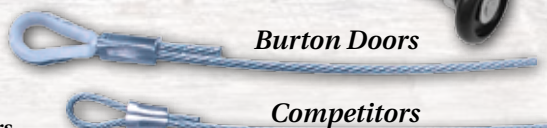

Burton Doors

Competitors